

DuPont™ Cyrel® 3000 PS

State-of-the-Art Solvent Processor




DuPont™ Cyrel® 3000 PS

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analogue and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 3000 PS is designed to be the most durable and reliable processor on the market. It is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

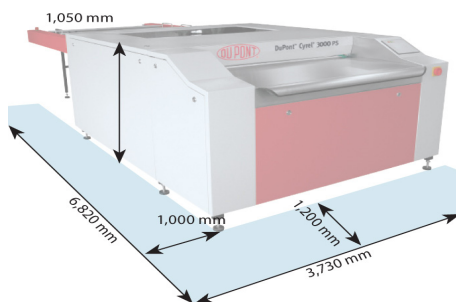

Floor Plan

Benefits

- Increased productivity
- Minimal floor space
- Maximum plate size 1,320 x 2,250 mm (52" x 88")
- Innovative washout process
- High dot resolution and fine line definition
- Integrated viscosimeter
- Robust and easy to support

Product Features

DuPont™ Cyrel® 3000 PS is capable of processing high quality photopolymer plates up to a format of 1,320 x 2,250 mm (52" x 88").

High dot resolution, excellent line definition, deep reverses and clean floors are achieved to meet the highest flexographic standards, irrespective of whether thick, thin, narrow or large plates are being processed.

An innovative washout process, consisting of eight flat brushes transverse to each other and nine contra-rotating round brushes, wash out the non-polymerised parts of the plate. Cleaning takes place through contra-rotating round brushes moistened with fresh solvent, clearing the plate of washout solution.

At the exit section, the plate is pulled over a rotating plush surface and dried. At the same time, the relief side can air dry.

The solvent temperature is programmable between 20°C to 40°C (68°F to 104°F) to handle the different brands of solvents available to the industry. The speed at which the plates pass through can be preset to adapt to the individual plate types. The integration of fresh solvent is controlled via a viscosimeter, which is constantly monitoring the solvent saturation during the entire process. The Cyrel® 3000 PS unit is operated and controlled through a large colour touch screen panel. The computer control board may store up to 21 different wash-out plate programs.





DuPont™ Cyrel® 3000 PS

State-of-the-Art Solvent Processor

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 3000 PS	Incremental solvent processor
SAP Article Number	D14577947	
Plate Thickness	0.5 mm to 7.0 mm	0.019" to 0.27"
Max. Nominal Plate Width	1,320 mm (52")	
Min. Nominal Plate Width	200mm (7.87")	
Max. Nominal Plate Length	2,250 mm (88.5")	
Fresh solvent tank	23 litres (5.0 Gal–UK)	
Min. solvent volume for operation	90 litres (19.8 Gal–UK)	
Max. solvent volume for operation	115 litres (25.3 Gal–UK)	
Max. tank volume	150 litres (33.0 Gal–UK)	
Electrical (Field Configurable)	380 / 400 Volt – 50 / 60 hz 220 / 230 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
Power (Nominal)	7 kW	
Current (Nominal Load)	16 Amp @ 400 Volt 25 Amp @ 230 Volt	Connecting wires 5 x 2.5 mm ²
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust	Ø 100 mm (3.9")	
Environmental Data	Temperature range: 15°C to 30°C (59°F to 86°F)	Relative humidity from 40% to 60% non-condensing
Compressed Air Supply	6 bar minimum	200 l / min–423.8 ft ³ / hour
Dimensions	Uncrated	Crated
D	4,670 mm (183.85")	5,300 mm (208.6")
W	1,980 mm (77.9")	2,300 mm (90.5")
H	1,050 mm (41.3")	1,600 mm (62.0")
Weight	1,460 kg (3,219 lbs)	2,120 kg (4,674 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH
 DuPont Electronics & Communications
 Hugenottenallee 175
 63263 Neu-Isenburg
 Germany
 Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited
 DuPont Electronics & Communications
 Wedgwood Way, Stevenage
 Hertfordshire SG1 4QN
 United Kingdom
 Tel: +44 (0) 1438 73 4863

www.cyrel.eu

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.