


DuPont™ Cyrel® FAST TD 4260

THE WORLD'S FIRST SOLVENT-FREE,
FLEXOGRAPHIC PLATE PROCESSOR

DuPont Packaging Graphics



DuPont™ Cyrel® FAST TD 4260

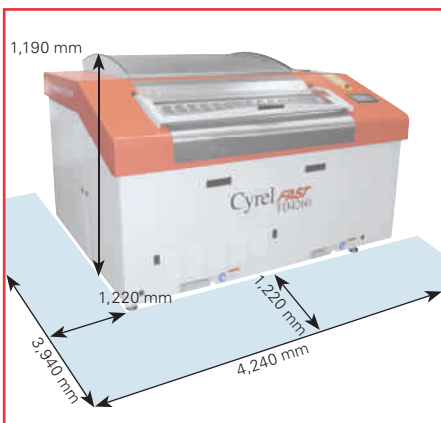

Technical Drawing

DuPont Packaging Graphics is a leading supplier serving the package printing markets with DuPont™ Cyrel® flexographic solutions. The Cyrel® systems for analogue and digital applications, which are available for solvent and thermal processing, comprise sheet photopolymer plates, continuous sleeves, plate making and mounting equipment. DuPont's complete range of equipment has been advancing Flexography for over 35 years. The DuPont™ Cyrel® systems are famous for their unmatched production performance, for top quality plates and improvements in the overall pre-press workflow.

The Cyrel® FAST TD 4260 is designed with customer needs in mind, it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

Benefits

- Maximum plate size 1,067 x 1,524 mm
- Extremely rapid access time
- Solvent free
- Robust and easy to support
- Optimum productivity

Product Features

DuPont™ Cyrel® FAST TD 4260 is a plate making system that uses dry, thermal technology to process high quality photopolymer plates, thus eliminating all solvents and aqueous solutions from the plate room.

The Cyrel® FAST TD 4260 allows the production of Cyrel® FAST finished plates of up to a nominal format of 1,067 x 1,524 mm (42 inch x 60 inch) in less than one hour, including the imaging and exposing steps, making it the ideal just-in-time plate making system for the market.

The Cyrel® FAST TD 4260 delivers outstanding plate quality and uniformity. This processor has the ability to produce a finished plate without solvent washout. The wide format Cyrel® 2000 ECLF for exposing and light-finishing plates is available to complement the Cyrel® FAST TD 4260 as an all-round system solution. As with all elements of the Cyrel® FAST system, it is environmentally friendly with no solvents to handle, store or recycle and no drying equipment is required.

The technology enhances the production of high quality plates quickly, by combining the efficiency and speed of digital plate imaging with the productivity and environmental benefits of dry, thermal plate processing.

The DuPont thermal plates are designed to meet the needs of high quality plates with fine tone, line-work and solids.



The miracles of science™

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® FAST TD 4260	Thermal developer (water cooled drum)
SAP Article Number	D12071679	
Packing	Crated	
Max. nominal plate width	1,067 mm – 42 inch	
Min. nominal plate width	610 mm – 24 inch	
Max. nominal plate length	1,524 mm – 60 inch	
Min. nominal plate length	762 mm – 30 inch	
Plate thickness	1.14 - 2.84 mm (0.045 – 0.112")	
Electrical (field configurable)	400 Volt – 50 / 60hz**	3Ph / PE**
Power (nominal)	19 kW	
Current (nominal load)	30 Amp per phase	** Connecting wires 5 x 6 mm ² for 400 Volt configuration.
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust	Ø 150 mm – 6.0 inch	213 m ³ / h (min)
Environmental Data	Temperature range 18°C to 27°C – 65°F to 80°F	Relative humidity From 40 % to 60 % non-condensing
Compressed Air supply	5.5 bar min	80 psi min
Dimension D	1,500 mm – 59.1 inch (un-crated)	1,800 mm – 70.9 inch (crated)
W	1,800 mm – 70.9 inch (un-crated)	2,080 mm – 81.1 inch (crated)
H	1,190 mm – 46.9 inch (un-crated)	1,550 mm – 61.1 inch (crated)
H – open	2,240 mm – 88.3 inch (un-crated)	
Weight	1,143 kg – 2,520 lbs (un-crated)	1,338 kg – 2,950 lbs (crated)
Colour	DuPont Grey & DuPont Red	

All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.

DuPont de Nemours (Deutschland) GmbH
 DuPont Electronics & Communications
 Hugentottenallee 173–175
 63263 Neu-Isenburg
 Deutschland
 Tel: +49 (0) 6102 18 4400

Du Pont (U.K.) Limited
 DuPont Electronics & Communications
 Wedgwood Way, Stevenage
 Hertfordshire SG1 4QN
 United Kingdom
 Tel: +44 (0) 1438 734485

To learn more, visit www.cyrel.co.uk
 or contact your Cyrel® specialist



The miracles of science™

DuPont Packaging Graphics

“Advancing Flexography”