



vulcan[®] Royal Form


Key performance

- Sticky back blanket
- High print quality
- High edge marking resistance
- Increased blanket lifetime
- Suitable for labels and envelopes printing
- Adhesive: clean and easy removal from the cylinder

MAIN APPLICATION

Business Forms, Labels

Vulcan Royal Form available in 2 ply, (0,90/0,95/1,00/1,05 mm) thickness.

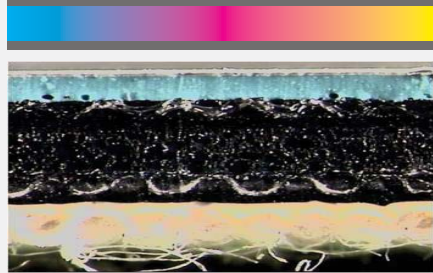

Vulcan Royal Form

✓ The product at a glance

INK COMPATIBILITY	Conventional
PRINTING SURFACE COLOUR	Blue
THICKNESS (mm)	0,90/0,95/1,00/1,05
AVERAGE LOAD VALUE N/cm² @ 0,10 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,8
ELONGATION (%)	NA
TENSILE STRENGTHS (N/mm)	NA
WATER & SOLVENT PROTECTION	NA
ADDITIONAL INFORMATION	
TOP FACE COMPOUND	UV inks version available (Royal Form UV)

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**