



# vulcan® Irio


## Key performance

- Specifically designed for a wide range of applications for premium brand advertising and packaging
- Perfect transfer of the pearlescent pigments (Iriodin®)
- Suitable also for all cold foil applications

## MAIN APPLICATION

Commercial Sheetfed

**Vulcan Irio is available in 3/4ply, 1,71/1,96 mm thickness.**

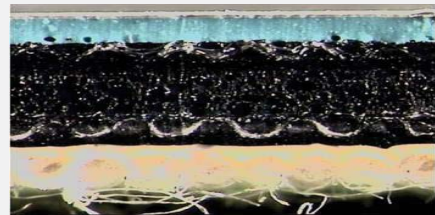

Vulcan Irio

## ✓ The product at a glance

<b>INK COMPATIBILITY</b>	Special Application
<b>PRINTING SURFACE COLOUR</b>	White
<b>THICKNESS (mm)</b>	1,71/1,96
<b>AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation</b>	250
<b>SURFACE ROUGHNESS (Ra micron)</b>	Special Cover
<b>ELONGATION (%)</b>	<0,9%
<b>TENSILE STRENGTHS (N/mm)</b>	>70
<b>WATER &amp; SOLVENT PROTECTION</b>	No
<b>ADDITIONAL INFORMATION</b>	
<b>COLD FOIL APPLICATION</b>	Enhancing quality of promotion brochures, food & cosmetic packaging, business reports, calendars and many others

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printing@trelleborg.com](mailto:printing@trelleborg.com)**