



vulcan® Event


Key performance

- A 3 ply blanket with microsphere
- Good smash resistance on a variety of stocks
- Excellent mechanical resistance
- Very good half tone reproduction and overall printing quality

MAIN APPLICATION

Commercial Sheetfed

Vulcan Event is available in 3-ply, 1,95 mm thickness.

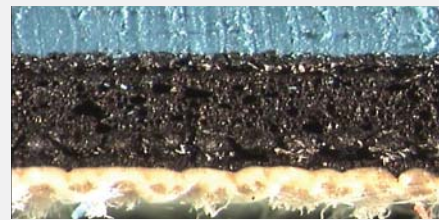

Vulcan Event

✓ The product at a glance

| | |
|---|--|
| INK COMPATIBILITY | Hybrid |
| PRINTING SURFACE COLOUR | Dark Blue |
| THICKNESS (mm) | 1,95 |
| AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation | 250 |
| SURFACE ROUGHNESS (Ra micron) | 0,6 |
| ELONGATION (%) | <0,9 |
| TENSILE STRENGTHS (N/mm) | >60 |
| WATER & SOLVENT PROTECTION | No |
| ADDITIONAL INFORMATION | |
| SPECIAL COMPRESSIBLE LAYER | Excellent reboundability characteristic to provide a good ink transfer during printing |

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**